



PLAN VIEW

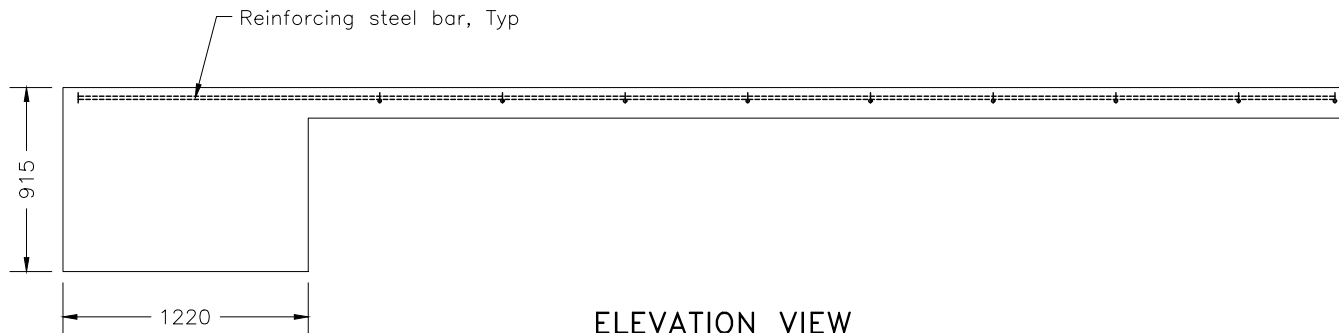

ELEVATION VIEW

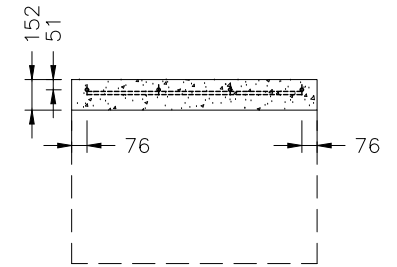

SECTION A-A

NOTES:

- A All reinforcing steel bar shall be 15M unless otherwise shown.
- B Steel reinforcement shall be Grade 400W according to CAN/CAS G30.18 with a minimum yield strength of 420 MPa.
- C All dimensions are in millimetres unless otherwise shown.

MINISTRY OF TRANSPORTATION ONTARIO DRAWING	June 2020	Rev	0
ENERGY ATTENUATOR, CRASH CUSHION QUADGUARD M10 WIDE SYSTEM, COMPONENT		----- -----	
REINFORCED CONCRETE PAD		MTOD 923.007	