



**2 LANE FACILITY
1 LANE IN EACH DIRECTION**

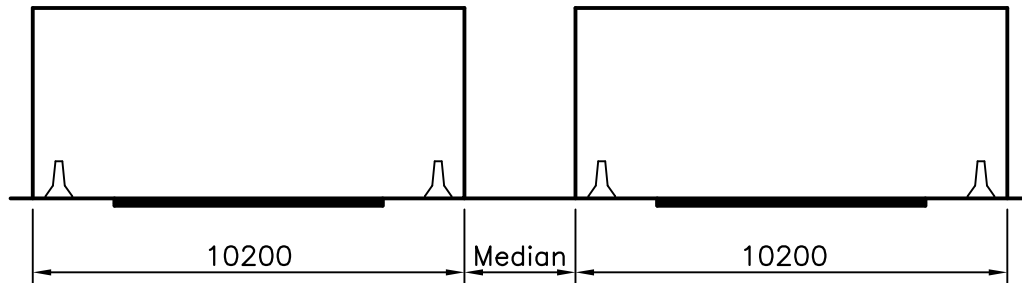

**4 LANE FACILITY
2 LANES IN EACH DIRECTION**

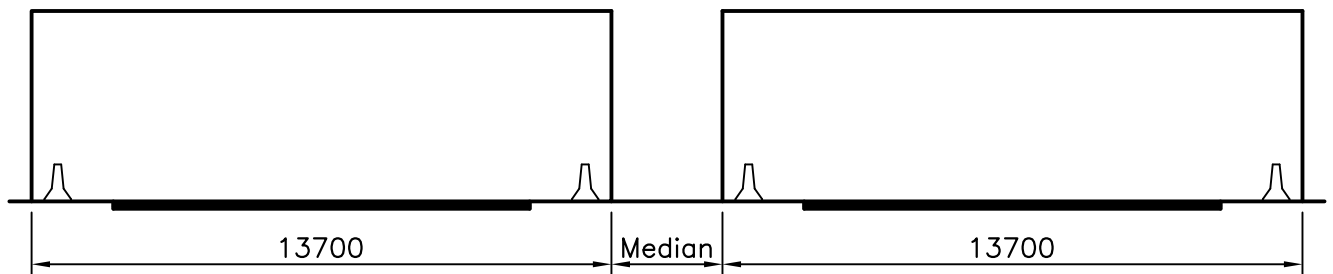

**6 LANE FACILITY
3 LANES IN EACH DIRECTION**

NOTES:

1. 4500mm minimum for solid or cast-in-place concrete slab bridges over roadways.
5000mm minimum for all girder type vehicular bridges over roadways.
2. Shoulder width shall be as specified.
3. Lane widths shall be as specified.
- A. All dimensions are in millimetres unless otherwise shown.

MINISTRY OF TRANSPORTATION ONTARIO DRAWING

July 2023

Rev 0

**FALSEWORK CLEARANCE
TO TRAFFIC LANES**

MTOD - 3390.150